


6-5 When we use 3 pieces of RF-1A(DC12V/1A) (distance 20M)

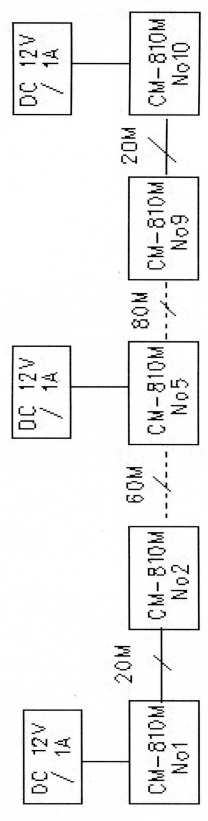

- Make wiring distance between first unit of CM-810M and power supply unit within 1 meter.
- Place every CM-810M from first unit to tenth unit, putting them by 20 meters respectively between every unit.
- Turn on second power supply unit, connecting it to fifth CM-810M Unit, which is placed in middle of this structure.
- Wire fifth CM-810M unit by placing it from power unit within 1 meter.
- Turn on third power unit connecting it to the last CM-810M.
- Wire power unit with the last CM-810M within 1 meter.

7. Specifications and features

7-1 Technical Specifications

Item	Description
Wire	CM-810M : 14 wires (Talking 10 wires, Power 2 wires, L & L1)
Power Source	DC12V 1A / RF-1A
Transmission way	Half duplex communication
Display Unit	FND
Power Consumption	Stand by : 50mA Maximum : 100mA
Communication Distance	Maximum 200m (ø0.65mm)

7-2 Features

- 1) Master between master communication.
- 2) Nice voice quality.
- 3) Hands-free communication.
- 4) High degree of sensitivity.
- 5) Privacy function prevents eavesdropping from others in the intercom system.
- 6) Offered with 3-call, 5-call channels(supporting up 6, or 10 stations).
- 7) Notify you of incoming calls with an electronic tone and an LED that indicates calling station.
- 8) Build your system with one or more master stations up to 10stations.

Contents

1. Greeting	1
2. Warnings and Caution	2
3. Names and function of each part	4
4. Operational functions	5
5. Wiring	6
6. Power Specifications	6
7. Specifications and features	8

	Instructions for users
Level-B product	The product is registered for electromagnetic compatibility for household use and can be used in all areas including residential areas.

1. Greetings

- * Thank you very much for purchasing of COMMAX products.
- * Please read carefully this user manual and follow its rules.
- * This intercom can be used in offices, and shopping outlets, and provide convenience to use communication on long distances.