



OFF DELAY TIMER ETF-N

CHARACTERISTICS

- Off delay timer with adjustable time range
- Delay time up to 30min
- External manual reset available
- SPDT instantaneous and time-limiting output contacts (1A1C) model available upon request




SPECIFICATIONS

Operating voltage	DC(V) : 12, 24 AC(V) : 12, 24, 110, 220, 240
Allowable operating voltage range	85~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A (resistive load)
Reset time	MAX 0.3S

Power consumption	Approx. 2VA
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50 °C
Ambient humidity	MAX 85%RH
Time range	3,6,10, or 60s, 1,3,10, or 30m

CONNECTION DIAGRAM

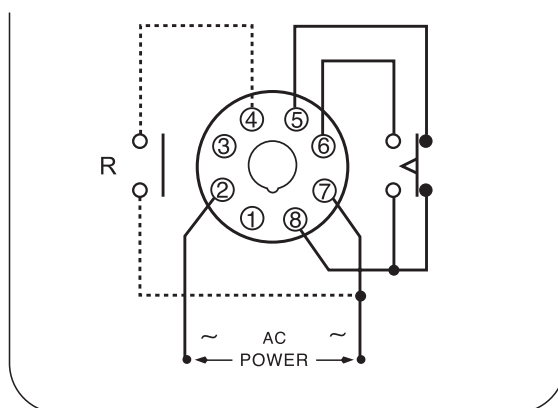

TIMING CHART

