


mm



Hinge short roller lever

## AZ 7141


Operating Force .....240 g max.  
 Release Force .....80 g min.  
 Pretravel .....6.5 mm max.  
 Movement Differential...1.5 mm max.  
 Overtravel .....2.0 mm min.  
 Operating Position .....40 ± 1.6 mm

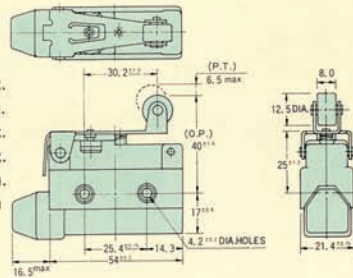

Overtravel plunger

## AZ 7110


Operating Force .....600 g max.  
 Release Force .....100 g min.  
 Pretravel .....2.0 mm max.  
 Movement Differential...0.8 mm max.  
 Overtravel .....5.0 mm min.  
 Operating Position .....44 ± 1.2 mm

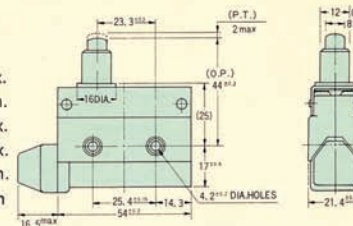

Panel mount plunger

## AZ 7310


Operating Force .....600 g max.  
 Release Force .....100 g min.  
 Pretravel .....2.0 mm max.  
 Movement Differential ...0.8 mm max.  
 Overtravel .....6.0 mm min.  
 Operating Position .....21.8 ± 0.8 mm

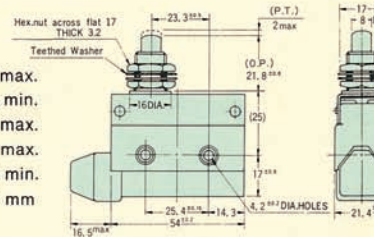

Panel mount roller plunger

## AZ 7311


Operating Force .....600 g max.  
 Release Force .....100 g min.  
 Pretravel .....2.0 mm max.  
 Movement Differential ...0.8 mm max.  
 Overtravel .....6.0 mm min.  
 Operating Position .....33.3 ± 1.2 mm

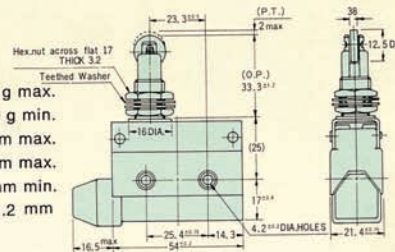

Compact overtravel plunger

## AZ 7100

Operating Force .....600 g max.  
 Release Force .....100 g min.  
 Pretravel .....2.0 mm max.  
 Movement Differential ...0.8 mm max.  
 Overtravel .....0.8 mm min.  
 Operating Position .....30 ± 0.8 mm

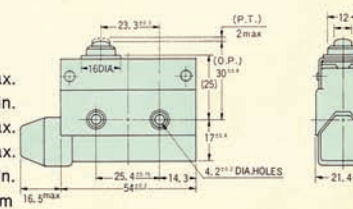

\* Epoxy-sealed terminal types

\*\* Neon lamp wired types

General tolerance: ±0.4