





NYLON CABLE TIE

MATERIAL SPECIFICATION:

- **Natural nylon:**
Camsco standard cable ties made from U.L. approved nylon 6/6. Normal service temperature range: -40°C to 85°C Flammability rating: UL 94V-2
- **Color:**
Natural (or white, standard color), black and other colors are available as requested.
- **Packing:** 100pcs / bag
- **Dimensions:**

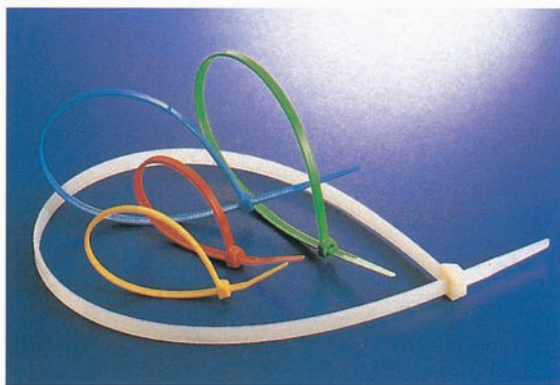

ITEM NO.	Dimensions			Max. Bundle Diameter	Min Tensile Strength
	L		W		
	mm	inch	mm	mm	LBS/KGS
CV-6024	60	2.4"	2.4	11	18/8
CV-8024	80	3.2"	2.4	15	18/8
CV-10025	100	4"	2.5	22	18/8
CV-12025	120	4.7"	2.5	28	18/8
CV-15025	150	6"	2.5	35	18/8
CV-16525	165	6.5"	2.5	40	18/8
CV-18025	180	7.1"	2.5	42	18/8
CV-20025	200	8"	2.5	50	18/8
CV-12036	120	4.7"	3.6	28	40/18
CV-15036	150	6"	3.6	35	40/18
CV-18036	180	7.1"	3.6	42	40/18
CV-20036	200	8"	3.6	50	40/18
CV-25036	250	10"	3.6	65	40/18
CV-30036	300	11.8"	3.6	82	40/18
CV-35036	350	13.6"	3.6	90	40/18
CV-38036	380	15"	3.6	102	40/18
CV-12048	120	4.7"	4.8	28	50/22
CV-15048	150	6"	4.8	35	50/22
CV-18048	180	7.1"	4.8	42	50/22
CV-20048	200	8"	4.8	50	50/22
CV-25048	250	10"	4.8	65	50/22
CV-30048	300	11.8"	4.8	82	50/22
CV-35048	350	13.8"	4.8	90	50/22
CV-38048	380	15"	4.8	102	50/22
CV-40048	400	15.7"	4.8	105	50/22
CV-45048	450	17.7"	4.8	118	50/22
CV-50048	500	19.7"	4.8	150	50/22
CV-55048	550	21.7"	4.8	160	50/22

ITEM NO.	Dimensions			Max. Bundle Diameter	Min Tensile Strength
	L		W		
	mm	inch	mm	mm	LBS/KGS
CV-65048	650	25.6"	4.8	190	50/22
CV-15070	150	6"	7.0	35	120/55
CV-18070	180	7.1"	7.0	42	120/55
CV-20070	200	8"	7.0	50	120/55
CV-25070	250	10"	7.0	65	120/55
CV-30070	300	11.8"	7.0	82	120/55
CV-35070	350	13.8"	7.0	90	120/55
CV-40070	400	15.7"	7.0	105	120/55
CV-45070	450	17.7"	7.0	118	120/55
CV-50070	500	19.7"	7.0	150	120/55
CV-20072	200	8"	7.2	50	120/55
CV-25076	250	10"	7.6	65	120/55
CV-30076	300	11.8"	7.6	82	120/55
CV-35076	350	13.8"	7.6	90	120/55
CV-38076	380	15"	7.6	102	120/55
CV-40076	400	15.7"	7.6	105	120/55
CV-45076	450	17.7"	7.6	118	120/55
CV-50076	500	19.7"	7.6	150	120/55
CV-40088	400	15.7"	8.8	105	175/80
CV-45088	450	17.7"	8.8	118	175/80
CV-50088	500	19.7"	8.8	150	175/80
CV-55088	550	21.7"	8.8	160	175/80
CV-65088	650	25.6"	8.8	190	175/80
CV-76088	760	30"	8.8	225	175/80
CV-92088	920	36.2"	8.8	265	175/80
CV-102088	1020	40.2"	8.8	295	175/80
CV-650120	650	25.6"	12.0	190	250/114
CV-760120	760	30"	12.0	220	250/114