


Category 5E UTP Cable, 350 MHz

57825-X, 57826-X

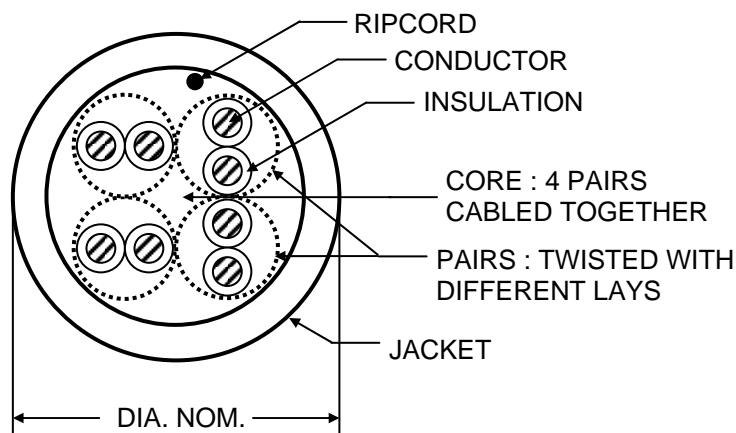

Description

AMP NETCONNECT Category 5E cables exceed TIA/EIA-568-B.2 requirements for Category 5E and ISO/IEC 11801 Class D performance. They comply with all of the performance requirements for current and proposed applications such as Gigabit Ethernet 1000Base-Tx, 10 and 100BASE-Tx, token ring, 155 Mbps ATM, 100 Mbps TP-PMD, ISDN, analog (broadband, baseband) and digital video and voice (VoIP). The cable is available in white, gray, blue and yellow, and packaged as wooden reels, reel-in-box and pull box.

Specification (Text in brackets [] requires a choice.)

Horizontal cabling shall be 24 AWG, 4-pair UTP, UL/NEC/NFPA [CMP or CMR] rated, with a [white, gray, blue or yellow] [plenum-rated] PVC jacket. [Individual conductors shall be 100% FEP insulated (if plenum)]. Cable jacketing shall be lead-free. Cable shall meet the performance requirements listed in the following table [include Performance Characteristics table from back page] in addition to all other standard Category 5e performance requirements. Cable shall be supplied [on wooden reels, in pull box or in reel-in-box]. Cable shall be UL listed under file number E138034. Flammability shall comply to NEC article 800 and NFPA 70; [CMP (NFPA 262, UL 910) or CMR (ANSI/UL 1666, IEC 332-1)]. Horizontal cable shall be AMP NETCONNECT part number [57825-X or 57826-X].

Description	UL/NEC Ratings	Nominal Diameter		V _p (nom%)	Weight	Package	Part Numbers				
		Dielectric	Outside				White	Gray	Blue	Yellow	
4-Pair Non-Plenum	CMR	0.032 in	0.205 in	70	24 lbs/mft	WR	57826-1	57826-3	57826-5	57826-7	
		± 0.0036	± 0.026			± 5 lbs	RB	57826-2	57826-4	57826-6	57826-8
							PB	6-57826-2	6-57826-4	6-57826-6	6-57826-8
4-Pair Plenum	CMP	0.032 in	0.195 in	74	22 lbs/mft	WR	57825-1	57825-3	57825-5	57825-7	
		± 0.0036	± 0.026			± 5 lbs	RB	57825-2	57825-4	57825-6	57825-8
							PB	6-57825-2	6-57825-4	6-57825-6	6-57825-8

Package: WR = Wooden Reel, RB = Reel Box, PB = Pull Box (1000 ft. ± 2%)

Category 5E UTP Cable, 350 MHz

57825-X, 57826-X

Performance Characteristics (meet or exceed TIA/EIA-568-B.2 Category 5e and ISO/IEC 11801)

Frequency, MHz	Attenuation, dB/100m Max.	NEXT, dB Min./Typical	PSNEXT, dB Min./Typical	ELFEXT, dB Min./Typical	PSELFEXT, dB Min./Typical	Return Loss, dB Min./Typical	ACR, dB Min./Typical	PS ACR, dB Min./Typical
0.772	1.8	72/81	69/77	- / -	- / -	- / -	70.2/79.2	67.0/73.4
1	2	70/79	67/75	64/71	61/68	20.0/28.0	68.3/77.3	65.1/71.2
4	4.1	61/70	58/66	52/59	49/56	23.0/31.0	57.2/66.2	53.9/60.3
8	5.8	57/66	54/62	46/53	43/50	24.5/32.5	51.0/60.0	47.7/54.8
10	6.5	55/64	52/60	44/51	41/48	25.0/33.0	48.8/57.8	45.5/52.2
16	8.2	52/61	49/57	40/47	37/44	25.0/33.0	44.0/53.0	40.6/47.6
20	9.3	51/60	48/56	38/45	35/42	25.0/33.0	41.5/50.5	38.1/45.6
25	10.4	49/58	46/54	36/43	33/40	24.3/32.3	38.9/47.9	35.5/42.6
31.25	11.7	48/57	45/53	34/41	31/38	23.6/31.6	36.2/45.2	32.7/40.5
62.5	17	43/52	40/48	28/35	25/32	21.5/29.5	26.4/35.4	22.7/30.7
100	22	40/49	37/45	24/31	22/28	20.1/28.1	18.3/27.3	14.2/23.2
155	28.1	37/46	34/42	20/27	17/24	18.8/26.8	9.4/18.4	5.9/14.7
200	32.4	36/45	33/41	18/25	15/22	18.0/26.0	3.4/12.4	2.5/9.8
225	34.7	35/44	32/40	17/24	14/21	17.6/25.6	0.3/9.3	0.5/8.7
250	36.9	34/43	31/39	16/23	13/20	17.3/25.3	-6.5	-4.7
300	41	33/42	30/38	14/21	11/18	16.8/24.8	-1.2	-
350	44	32/41	29/37	13/20	10/17	16.3/24.3	-	-

Impedance: 100 ohms \pm 15%, 1 MHz to 350 MHz

Propagation delay: 538 ns/100 m max. @ 100 MHz

Skew: 25 ns/100m max

Mutual capacitance: 5.6 nF/100m max

Conductor resistance: 9.38 ohms/100m max

Bend radius: (4 X cable diameter) \approx 1"

Materials:

Conductors - 24 AWG solid bare copper

Insulation -

57826 - Polyethylene, 0.037 in \pm 0.0036 dia. nom.

57825 - FEP, 0.032 in \pm 0.0036 dia. nom.

Jacket -

57826 - FR PVC, 0.200 in \pm 0.026 dia. nom.

57825 - FEP 0.195 in \pm 0.026 dia. nom.

Operating temperature: -20°C – 60°C

Storage temperature: -20°C – 80°C

Approvals: UL listed file no. E138034

CMR – (UL 1666, IEC 332-1)

CMP – (NFPA 262, UL 910)

ETL Certificate Number J20049516-001

Specifications subject to change without notice.

Revised 2/07.

<http://www.ampnetconnect.com/thailand>

