


Bosston

A QUALITY PRODUCT

TELEPHONE

EXPLOSIONPROOF

For UL.60079-1 Standard Class I,II Div.1 and 2 Groups C,D,E,F and G

For IEC.60079-0 to 1 Standard Zone 1 and Zone 2

Technical data

Type of Protection: Ex de IIA T6

Conforming to : Standards IEC 60079 - 0 to 1 or UL 60079-1

Marking for test : Ex II2G

Degree of Protection : IP 65 acc.To IEC 60529

Storage Temp. (Ta) : 10 °C to+ 65 °C

Electrical Ratings : 220 VAC. 0.025A 85dB at 10ft.

Type : ETP 1



ISO9001:2008

ETP TYPE



Applications:

The ETP1 Telephone is used

- For communication in hazardous atmospheres such as oil and gas refineries, chemical plants, loading station, paint manufacturing plants grain processing areas or similar industries.
- For indoor and outdoor locations.

Features:

- Copper-free aluminium body, coated with epoxy-polyester powder for corrosion resistant.
- Surface mounting on vertical flat surface.
- Excellent clarity and high output sound level.
- 1/2" or 3/4" inch NPT standard hub at bottom view.

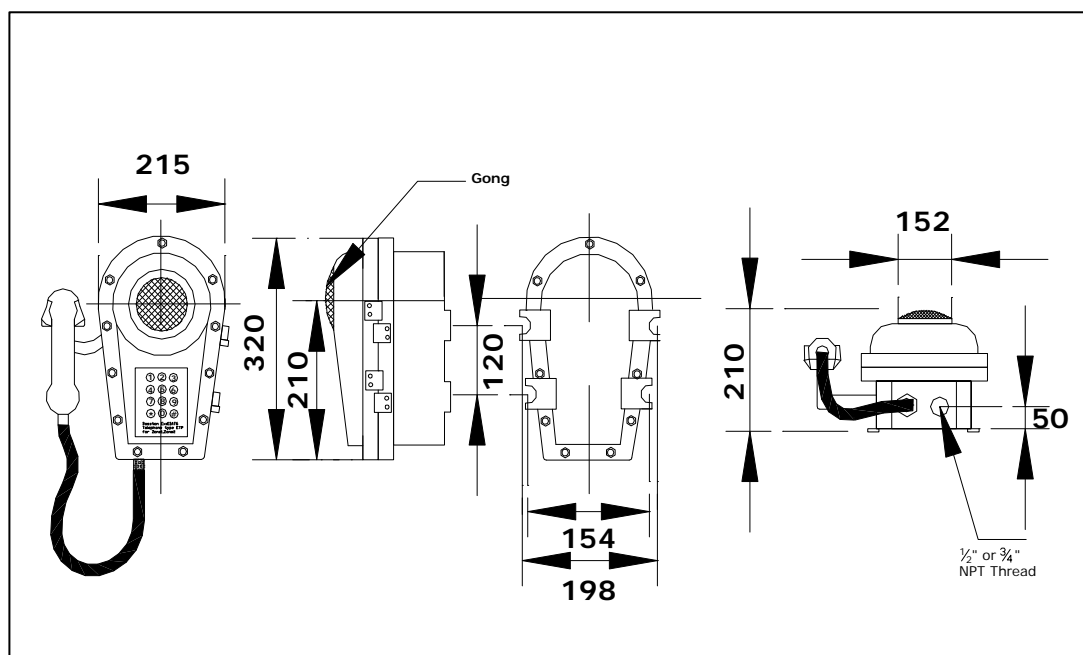
Standard Finishes:

- Copper-free aluminium - Epoxy-polyester powder
- Stainless steel - Natural
- Sheet - Epoxy - polyester powder coated. RAL 3018

Standard Materials:

- Body and fixtures - Copper-free aluminium
- Bolts - Stainless steel
- O-ring gasket - Silicone

Dimension : (in mm.)


I