




AC SOLENOIDS

COIL EPOXY TYPE

NEW

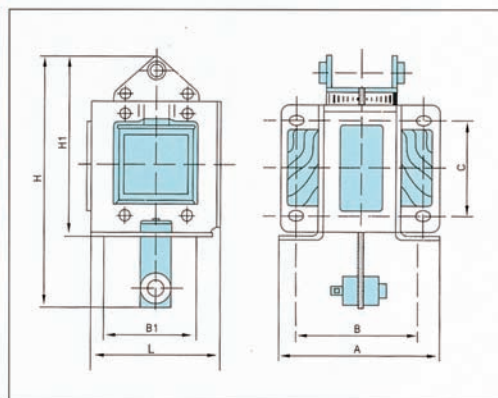

DIMENSIONS

SPECIFICATIONS

ITEM NO.	RATED PULL (kg)	RATED STROKE (mm)	FREQUENCY OF OPERATION per hr	RATED VOLTAGE (AC)
TAS-02N	0.2	10	1500	24. 36. 110. 220. 380
TAS-03N	0.3	10	1500	24. 36. 110. 220. 380
TAS-05N	0.5	10	1500	24. 36. 110. 220. 380
TAS-06N	0.6	10	1500	24. 36. 110. 220. 380
TAS-08N	0.8	10	1500	24. 36. 110. 220. 380
TAS-5N	1.0	15	1200	24. 36. 110. 220. 380
TAS-10N	1.5	15	1200	24. 36. 110. 220. 380
TAS-15N	2.0	15	1200	24. 36. 110. 220. 380
TAS-20N	3.0	20	900	36. 110. 220. 380
TAS-25N	4.0	20	900	36. 110. 220. 380
TAS-30N	5.0	20	900	36. 110. 220. 380
TAS-40N	6.0	30	900	220. 380
TAS-45N	8.0	30	900	220. 380
TAS-50N	10	40	600	220. 380
TAS-56N	12	40	600	220. 380

DIMENSIONS

UNIT:mm

ITEM NO.	SIZE	H	H1	L	A	B1	B	C
TAS-02N		53	48	27	41	24	35	35
TAS-03N		47	47	30	42	25	33	33
TAS-05N		85	62	38	34.5	28	24	33
TAS-06N		85	62	38	37	28	27	33
TAS-08N		85	62	38	43	28	32	33
TAS-5N		93	69	47	45.5	34	35	35
TAS-10N		93	69	47	51	34	41	35
TAS-15N		93	69	47	55.5	34	45	35
TAS-20N		130	96	61.5	71	46	55.5	46
TAS-25N		130	96	61.5	76	46	61	46
TAS-30N		130	96	61.5	82	46	67	46
TAS-40N		171	123	84	102	64	83	64
TAS-45N		171	123	84	112	64	93	64
TAS-50N		201	146.5	100	87	60	70	60
TAS-56N		201	146.5	100	97.5	60	80	60