


4 CH HD Passive UTP Video Balun

4CH HD Video Balun is a device which convert video signal into balanced signal applicable to be transmitted on common Cat-5 unshielded twisted pair wire with perfect transmission effect, which can be applied in the occasions such as video monitoring, video meeting and can transmit four channels of video image simultaneously on an 8-core Cat-5 twisted pair wire, It can simplify the wiring project and save wire use quantity.

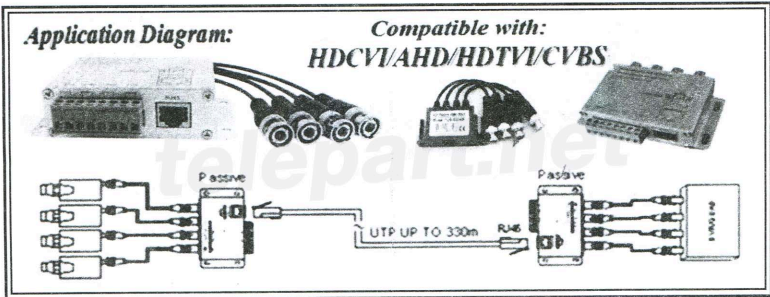

Features:

- Adapt differential signal transmission with excellent anti-jamming ability
- Save project cable expend, each twisted pair wire transmits one channel of video signal and one common Cat-5 unshielded twisted pair wire can simultaneously transmit four channels of video signal
- Full-motion CCTV video at distances up to 350m when used with any passive UTP video transceiver
- Up to 1500m with any active UTP video receiver
- No power required
- Built-in transient suppression protection

Connection method:

- Clamp modular plugs for a Cat-5 unshielded twisted pair wire according to the connection order of TIA/EIA-568B (please refer to the following figure), connect the clamped modular plugs to the RJ45 sockets, connect the coax to the connection terminal.

Technical specifications:

- Frequency response: DC-8MHZ
- CMRR (Common Mode Rejection Ratio): 60DB
- Impedance: BNC: 75Ω ; RJ45: 100Ω
- Working temperature: -10°C-70°C
- Storage temperature: -30°C-70°C
- Applicable to NTSC, PAL, SECAM and CCIR systems
- External dimension: 105mm*58mm*29mm(excluding BNC)

TIA/EIA-568B

PIN	COLOR
1	W.O
2	W
3	W.G
4	BL
5	W.BL
6	G
7	W.BL
8	BR

Type of the required wire:

Unshielded Cat-5 or above twisted pair wire (Please use standard Cat-5 or above twisted pair wire.

The wire quality will directly affect the transmitted image effect and transmission distance.)

Characteristic impedance: 100Ω±20Ω

DC loop resistance: 18Ω/100m

Differential capacitance: 62pf/m(Maximum)