


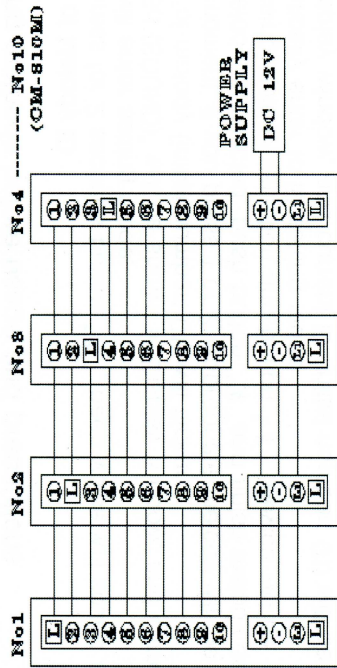

5-1 Wiring method

– This product use LINE CORD terminal for wiring.


- 1) Terminal 10P: It connects with LINE CORD 10P CONNECTOR. Number of this unit will be connected to terminal "L".
- 2) Terminal 4P: It connects with LINE CORD 4P CONNECTOR. (+, -, L1, L)

** It is recommended to use Adaptor 12V Trans Type.

6. Power Specifications

This product's composition schema is different by distance of power supply units and quantity of installing intercom units.

6-1 When we use only one RF-1A(DC12V/1A) (distance 50M)

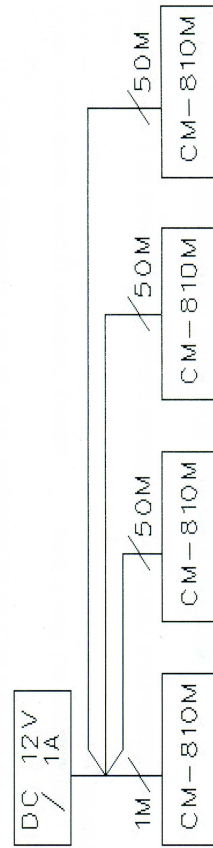

- In case of usage of 12V/1A as it is in picture, maximum 4 units will be connected.
- It is needed to wire adaptor and first CM-810M at maximum closest way within 1 meter.
- It will possible to wire in parallel way by every 50 meters.

Warning

Cleaning & Use

Please don't disassemble, repair or rebuild this product arbitrarily (please contact the service center if a repair is needed).

- It may cause an electric shock or fire.

No disassembly

Electric shock

Fire

Unplug

If an abnormal sound, burning smell or smoke is coming out of the product, please plug out the power cable and contact a service center.

- It may cause an electric shock or fire.

Electric shock

Fire

Please don't insert any metallic or burnable materials into the ventilation hole.

- It may cause an electric shock or fire.

Prohibition

Electric shock

Fire

Please use only the designated batteries for the products of using DC power.

- It may cause an electric shock or fire.

Request

Caution

Power & Installation

Please plug the power cable firmly into the inner end.

- It may cause a fire.

Request

Fire

Please hold the plug tightly when unplugging the power cable (a part of the copper wire may be disconnected if the grabbing is only made on the cord when pulling out the cable).

- It may cause an electric shock or fire.

Request

Electric shock

Fire

When connecting the power cables after cutting the cable, please install the product with power off.

- It may cause an electric shock or fire.

Request

Electric shock

Fire

When installing the product, please fix it firmly while using the wall-mounting unit and screws.

- It may cause an injury from the falling object.

Request

Cleaning & Use

When cleaning the product, please rub it with a soft and dry cloth after plugging out the power cable. (Please don't use any chemical products such as wax, benzene, alcohol or cleanser.)

Prohibition

Please don't drop the product on the ground and don't apply a shock.

- It may cause a failure.

Prohibition

Please check the use voltage and current for the DC-only products and use the appropriate rectifier.

- It may cause a fire.

Request

Fire

Please avoid direct rays of the sun or heating devices at a time of installation.

- It may cause a fire.

Request

Overheating

Fire

Please don't install the product on an unstable place or small support board.

- It may cause an injury if it falls down while in use.

Request

Power & Installation

Please use the designated connection cable within the maximum calling distance designated for the product.

- It may reduce the product performance.

Request