

VIDEO BALUN Series

ITEM NO.: SCB001VH, SVB001


SCB001VH Coaxial BALUN For DVR

- BNC male to BNC female with mini cable 15 on both sides.
- Perfect work with DVR to immunity DVR interference.
- Built in a highly balanced mode of video transmission, which is immune to interference from these, and other sources of noise: Data signals, other video signals, nearby power, ringing telephones, fluorescent lights, transformers, and more...

Application and Installation:

Add SCB001VH on video receive side (Front of Monitor or DVR) to immunity the Interference, which caused by mismatch of Impedance Matching.

If there is still some noise, Then use monitor to check each connecting point (between two wire connection), to find out where is the source of interference, then add one more SCB001VH to compensate the Impedance Matching for clear video Image. If you are not able to check where is the source of interference, then add SCB001VH on all of wire connection and camera.

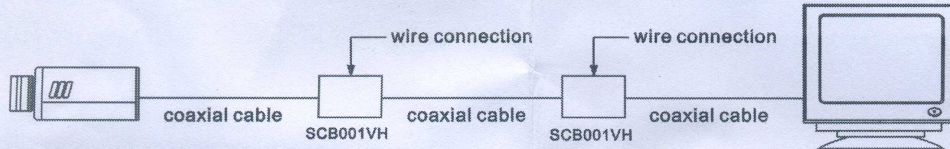


SVB001 Twisted Pair VIDEO BALUN

- Eliminate interference under long range cabling caused by "Impedance Matching", add SVB001 BALUN at "connecting point" between two-wire connections for compensation.
- Including 4 pieces UY connectors for connection.

Application and Installation:

Using STP111VH/STP414VH...etc VH Series put at receiver side (Front of Monitor or DVR) to immunity the interference. If the interference not able to clean up by VH series. Then use monitor to check each connecting point (between two wire connection), to find out where is the source of interference, then add one more SVB001 to compensate the Impedance Matching for clear video Image. If you are not able to check where is the source of interference, then add SVB001 on all of wire connection and camera.

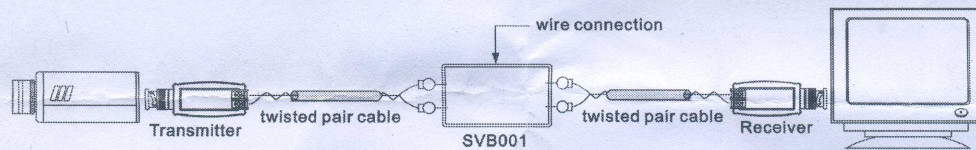

Specification:

ITEM NO.	SCB001VH	SVB001
Cable	Coaxial	Twisted Pair
Cable Connection	BNC male to BNC female	UY connector
Dimensions W x H x D mm	74x28x21 with 19cmx2 cable	35x25x20 with 12cmx2 cable

RoHS CE FC