

Camsco**MULTI RANGES TIMER AH-5B****FEATURES**

- Exclusive CMOS IC assures high performance stability, and accuracy.
- 4 Time ranges can be changed with ease by merely exchanging DIP switch.
- EASY-to-monitor DIP switch positions, time series and operation voltage.
Five time series with wide timing ranges from 1 sec to 30 hrs.
- 2C delay or 1C delay with 1C instant combination obtainable by switching MODE A or MODE B

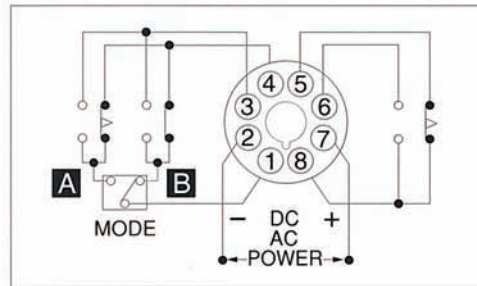
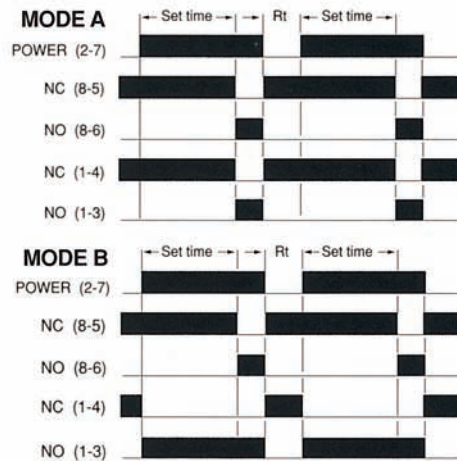
TIME RANGE

Four setting times are available for each timer by setting the DIP switches to required positions

ITEM NO.	TIME RANGES
AH5B--A	1S-10S-1M-10M
AH5B--B	3S-30S-3M-30M
AH5B--C	1M-10M-1H-10H
AH5B--D	3M-30M-3H-30H
AH5B--E	6S-60S-6M-60M

SPECIFICATIONS

RATED VOLTAGE	A.C. 12V,24V,110V,220V,380V, D.C. 12V,24V
MOUNTING & SOCKET	SURFACE : P2CF-08 FLUSH : US-08
CONTACT RATING	250VAC 5A(P.F.=1)
SETTING ERROR	10% max
REPEAT ERROR	1 % max
RESET TIME	0.1sec max
AMBIENT TEMP.	-10°C ~ 55°C
CONSUMED POWER	3VA

**CONNECTION DIAGRAM****OPERATION TIME CHART****DIMENSIONS (mm)**